

FITTING INSTRUCTIONS

CHILD SAFETY AND CLEANING CATCH IPA NO.s 21162-64

IPA NO.S 21162-63 ARE USED IN CONJUNCTION WITH IPA NO.S 21144-52, 21874-82 AND 21046-52.
 IPA NO. 21164 ARE USED IN CONJUNCTION WITH IPA NO.S 21144-52 AND 21046-52.

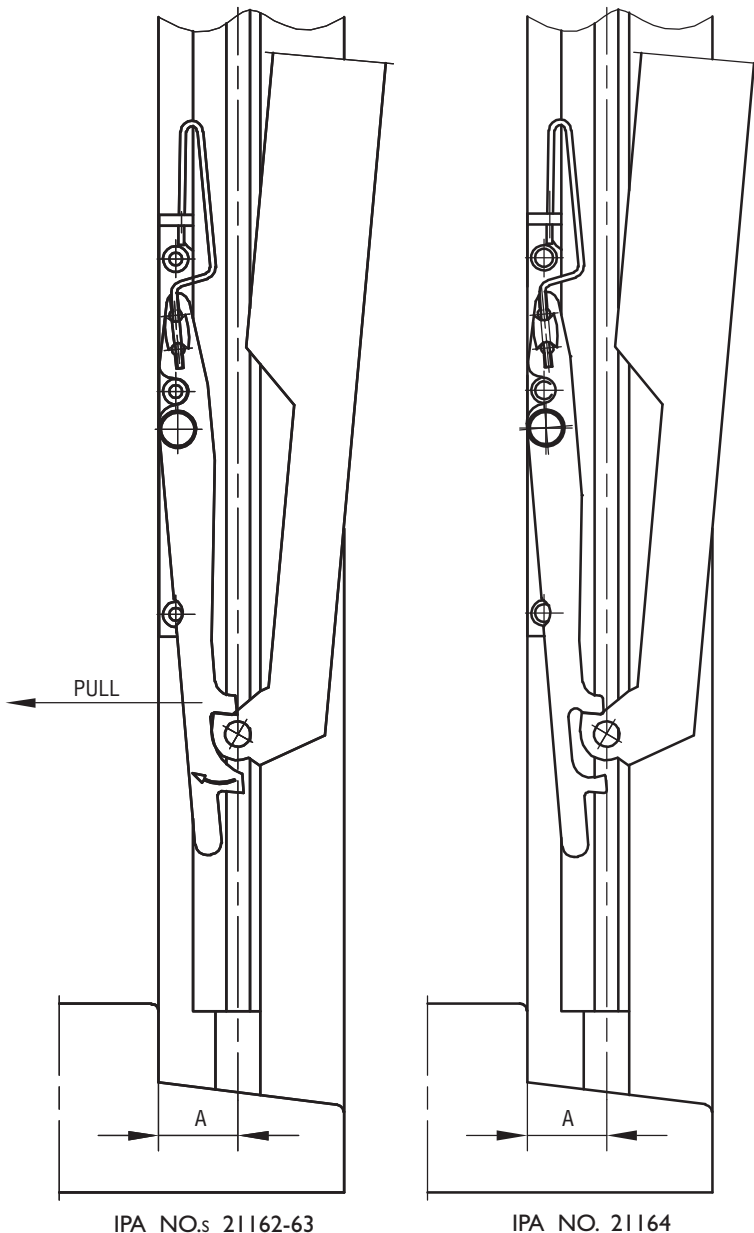


FIG. 1

FITTING:

1. PLACE THE SAFETY CATCH IN THE LEFT SIDE FRAME SO THAT THE FRONT EDGE OF THE FITTING PLATE LIES AGAINST THE REAR EDGE OF THE ALUMINIUM RAIL.
2. THE VERTICAL POSITION DECIDING THE SIZE OF THE OPENING GAP IS OPTIONAL. THE OPENING GAP DEPENDS ON BOTH THE VERTICAL POSITION OF THE SAFETY CATCH AND THE MODULE SIZE.

OPERATING INSTRUCTIONS:

1. THE WINDOW IS OPENED UNTIL THE SAFETY RESTRICTOR AUTOMATICALLY ENGAGES.
2. IPA NO 21162-63: TO FURTHER OPEN THE WINDOW CLOSE THE WINDOW APPROX. 2 CM, PRESS THE BOTTOM PART OF THE SAFETY RESTRICTOR IN THE DIRECTION SHOWN BY THE ARROW. PUSH THE SASH TO OPEN THE WINDOW. LET GO OF THE SAFETY RESTRICTOR AND IT WILL ENGAGE IN THE NEXT POSITION. TO FULLY OPEN THE WINDOW - REPEAT THE PROCES.
- IPA NO. 21164: TO OPEN AND CLOSE THE WINDOW PRESS THE BOTTOM PART OF THE SAFETY RESTRICTOR IN THE DIRECTION SHOWN BY THE ARROW. PUSH/PULL THE SASH TO OPEN/CLOSE THE WINDOW.
3. NEXT TIME THE WINDOW IS OPENED THE SAFETY RESTRICTOR AUTOMATICALLY RE-ENGAGES.

MAINTENANCE:

DO NOT PAINT THE FITTING.
 WHEN FITTING - LUBRICATE THE MOVABLE METAL PARTS OF THE MECHANISM WHILE ACTIVATING REPEATEDLY. HEREAFTER LUBRICATE MINIMUM TWICE A YEAR.

IPA NO.	A
21162	MIN. 23
21163 + 64	MIN. 21 MAX. 22.9

FIG. 2